


NIPPEN Provides a comprehensive range of current transformers for measuring applications. These are available in secondary current of 5A or 1A. They comply with IS2705/BS7626/IEC185 and are type tested at ERTL(W)

WINDOW TYPE CURRENT TRANSFORMER: (a) NE 201 (b) NE 301 (c) NE 401 (d) NE 501 (e) NE 601 (f) NE 801 (g) NE 1001

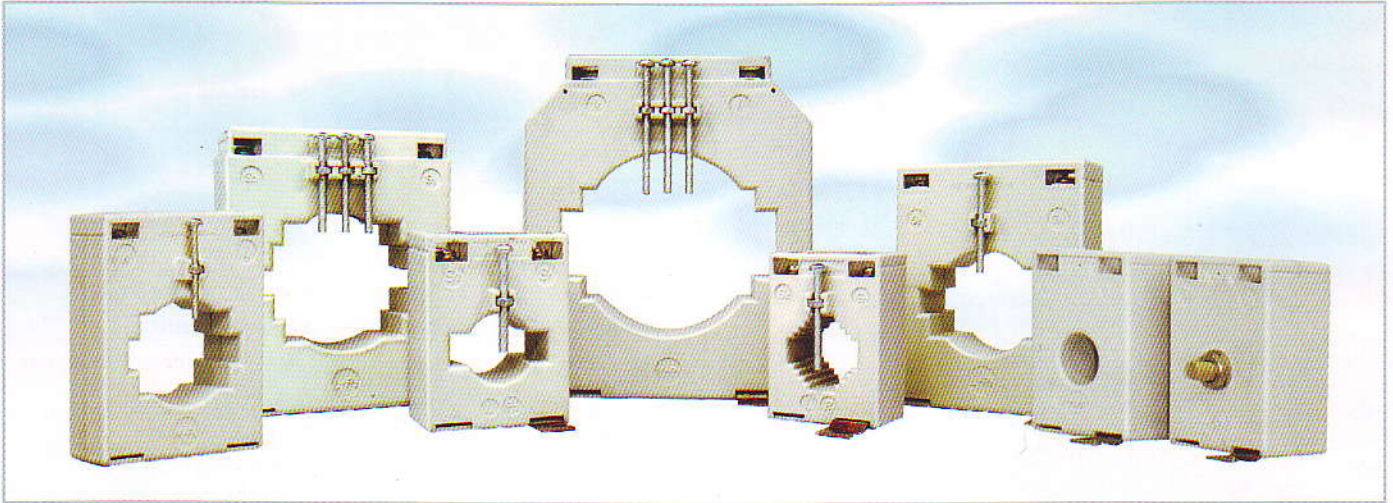

ACCESSORIES: (a) Mounting Brackets (b) Fixing Screw with insulated bush for window type.
(c) Secondary Terminal Cover (Optional) (d) DIN Rail adaptor (optional)

NE 201




Cable 20.4 mm

PRIMARY CURRENT	ACCURACY CLASS		
	1 VA	2.5 VA	5 VA
100	1		
150	1		
200		1	
250		1	
300		1	
400			1
500			1

NE 201


Overall DIM^m same as NE 201



WOUND PRIMARY CT
size 78X 55X 40

PRIMARY CURRENT	ACCURACY CLASS		
	2.5 VA	5 VA	1 VA
20	1		
30	1		
40		1	
50		1	
60		1	
75		1	


NE 301



BUS BAR 30 X 10 mm

PRIMARY CURRENT	ACCURACY CLASS		
	1 VA	2.5 VA	5 VA
75	3		
80	3		
100	1		
125	1		
150	1	3	
200		1	
250		1	
300		1	
400			1


NE 401



BUS BAR 40 X 10 mm

PRIMARY CURRENT	ACCURACY CLASS		
	2.5 VA	5 VA	1 VA
150	1		
200	1		
250	1		
300	1		
400		1	
500		1	
600		1	


NE 501



BUS BAR 50 X 10 mm

PRIMARY CURRENT	ACCURACY CLASS		
	2.5 VA	5 VA	10 VA
300	1.0		
400	1.0		
500	1.0		
600		1.0	
750		1.0	
800		1.0	
1000			1.0
1200			1.0
1250			1.0


NE 601



BUS BAR 60 X 10 mm

PRIMARY CURRENT	ACCURACY CLASS		
	10 VA	15 VA	5 VA
400	1		
500	1		
600	0.5	1	
800	0.5	1	
1000	0.5	1	
1200		1	
1500		1	
1600		1	


NE 801



BUS BAR 80 X 10 mm

PRIMARY CURRENT	ACCURACY CLASS		
	15 VA	10 VA	5 VA
400	1		
500	1		
600	1		
800		0.5	1
1000		0.5	1
1200		0.5	1
1500		0.5	1
1600		0.5	1
2000		0.5	1

NE 1001



BUS BAR 100 X 30 mm

PRIMARY CURRENT	ACCURACY CLASS		
	10 VA	15 VA	30 VA
800	0.5	1	
1000		0.5	
1200		0.5	
1500		0.5	
1600		0.5	
2000		0.5	1
2500		0.5	1
3000		0.5	0.5
4000		0.5	0.5